


BASELIGHT™

READY FOR TOUGH CHALLENGES

Performance
Economy
Agility

420X

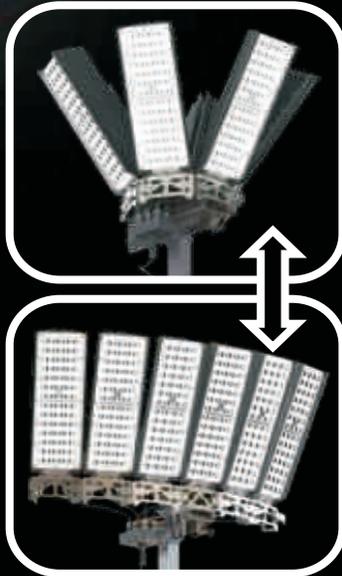

50.000 LM
35kg (77lb)
DIMMABLE
4.25m
420W
IP67
BIS Approved

Application Scenarios

Disaster Relief
Rescue Operations
Construction Sites
Maintenance Work
Road Construction
OffGrid Work
Events/Sports/Media/Film
Airports
Law Enforcement
Military Operations
Under Frame Dug-Work
[In Railways]



KEY FEATURES

Deployed by a single person in 30 seconds without aid of machinery

Produces 50 000 lumen with 420 power consumption

Configured as 360 or 180 degree floodlight

Produces about 30% more light than a 4x400W halogen system

Consumes 75% less power compared to a 4x400 halogen system

Multiple units can fit into a normal family car

Requires no prior training or certification and is simple to operate

Multiple units can be operated from a portable generator

Built for easy replacement of parts with a modular design

Can be used indoors as well as outdoors (IP67) and in extreme temperatures

Safe to operate with colour coded guidance

Takes up little space when stored

50 000 hours life span on LED, 2 Year warranty on structural components

35 Kg (77lb)

TECHNICAL DATA

Wind resistance	up to 20 m/s without support
Luminous flux	50 000 Lumen
Surrounding temperature	- 20 to + 50 degree C
Voltage	90 to 305VAC/50hz
Power connector	CEE or Schuko
Colour temperature	6000 Kelvin
Power consumption	15 to 420 Watt (Dimmable)
IP Rating	67
Weight	35 Kg (77lb)
Fully extended height	4.25 Meters
Transport dimensions	1200mm x 300mm
Warranty	2 Years
Certification	CE approved/BIS Approved

 **BASELIGHT**
PRIME DESIGN SWEDEN



Exclusive Distributor:

MediHelp Healthcare Pvt. Ltd

6052/1, D-6, Vasant Kunj, New Delhi-110070
Ph.No. : +91-11- 4605 2020, Mobile : +91 9871 555 932

E : medihelpindia.in W : www. first-aid.in